


Junction box КСП-55-ОМ3

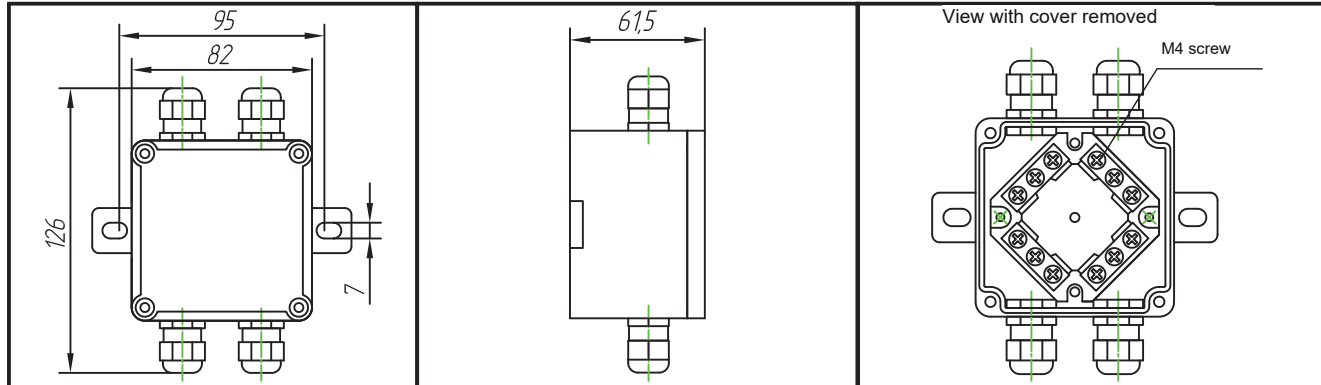

Description: Junction box made of impact-resistant, fiberglass-reinforced, flame-retardant thermoplastic. Intended for installation in DC and AC circuits, lighting, broadcasting, signalling and control networks. OM climatic version, placement category 3, for installation in enclosed damp and dry spaces.

КСП-55-ОМ3	
Technical documentation (RMRS, RRR acceptance)	TU БКЦ-003-2009
Technical documentation (VP acceptance)	TU БКЦ-003В
Degree of protection	IP55
Flammability category	UL94 V0
Auto-ignition temperature	960°C
Enclosure material	thermoplastic
Cable gland material	thermoplastic
Number of cable glands	4
Cable diameter, mm	10-14
Terminal block	4 poles, 3 terminals, 2.5 mm ² .

Connect no more than two conductors with a cross-section of 2.5 mm² to the terminal.

Terminal lug type	Ring
Voltage, V:	
- alternating current	380
- direct current	220
Rated current, A	16
Mass, kg	0,23

Manufacture with an external M4 grounding screw is possible.

Manufacture with different numbers of cable entries is possible: 2, 3, 4.

Manufacture with a cable entry of a different diameter is possible (6-12, 10-14, 8-16, 13-18 mm).

To be specified when ordering: КСП-55-ОМ3 with external grounding screw, cable entry diameter 6–12 mm.

Supply with acceptance:

- RMRS
- RRR
- VP



Junction boxes

Metal junction boxes

Plug transformers

Push-button stations

Cam switches

Cam selector switches

Cabin switches and sockets

Junction boxes with protection unit

Power boxes with protection unit

Interference suppression filters

Electromagnetic starters

AC UPS

DC UPS

Media server