




Plug transformer for portable lighting ШТПО

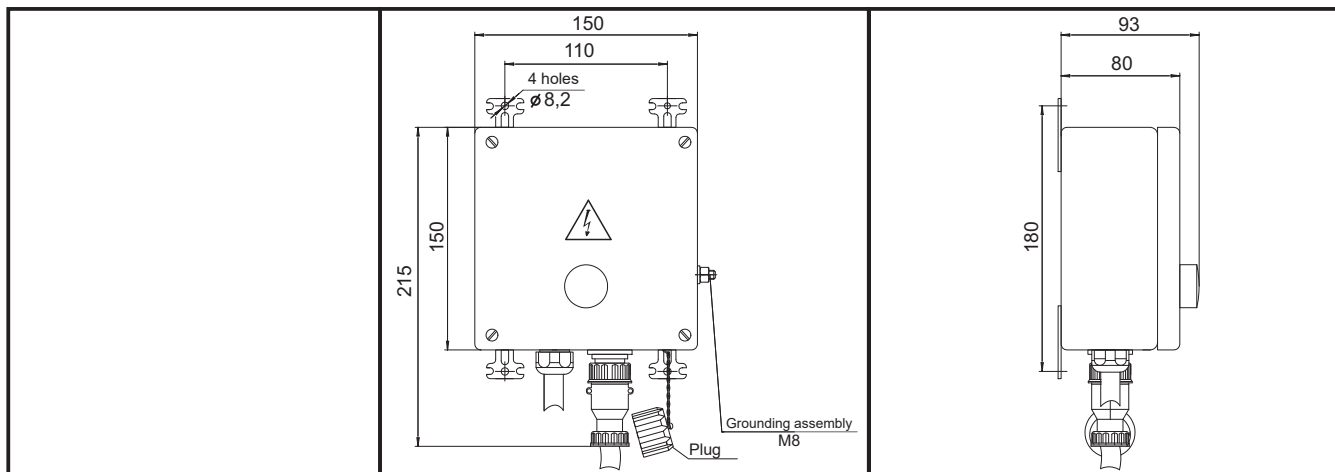

Description: Plug-in transformer for supplying portable lighting fixtures with 12, 24 or 36 V incandescent lamps rated at 40 W from a 220 V shipboard network. OM climatic version, placement category 1, for installation in enclosed spaces and on open deck, including vessels of unrestricted navigation area.

Note: for open decks of vessels operated under marine conditions, use a stainless steel enclosure (to be specified when ordering).

Technical documentation: RMRS, RRR acceptance - TU БКЦ-005-2009;
VP acceptance - TU БКЦ-005B.

Main parameters:

Transformer winding	Voltage, V	Frequency, Hz	Power, VA	Cable gland		Degree of protection	Enclosure material	Mass, kg
				Qty., pcs.	Cable outer diameter, mm			
Primary	220	50	63	1	from 10 up to 17	IP66	Metal	2,9
Secondary	12, 24, 36	50						

Product designation structure

ШТПО-220/ X - 66 - OM1

Type

Output voltage:

12 - 12 V, 50 Hz

24 - 24 V, 50 Hz

36 - 36 V, 50 Hz

Index for degree of protection:

66 - IP66

OM climatic version, installation category 1

Supply with acceptance:

- RMRS
- RRR
- VP

