


Control and indication station, ПКП series.

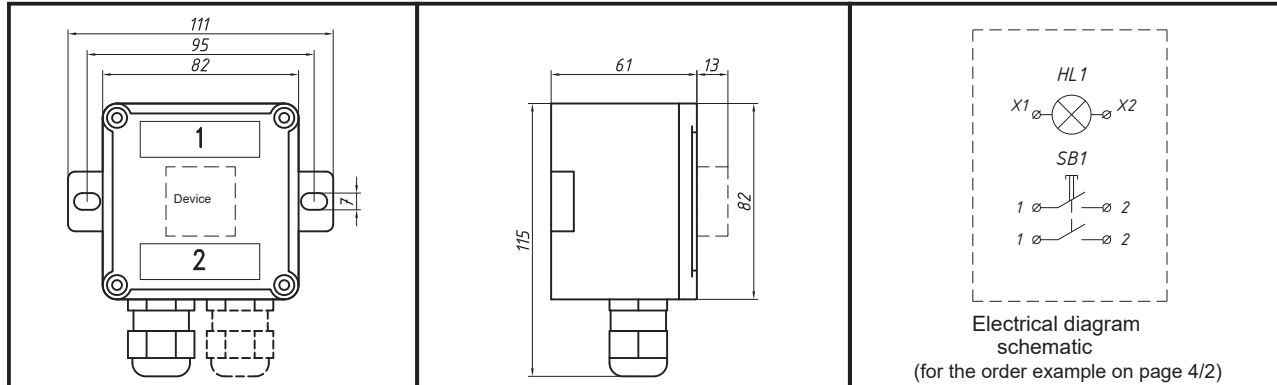

Description: Push-button station made of impact-resistant, fiberglass-reinforced thermoplastic, resistant to solar radiation and flame-retardant.

Designed for switching AC control circuits up to 400 V at 50 Hz and DC circuits up to 220 V and/or providing local or remote indication signals.

*OM climatic version, installation category 1 per GOST 15150-69. Degree of protection: IP66; IP65 when fitted with a buzzer; IP67 when fitted with a cam switch or selector, per GOST 14254-96. Suitable for open decks and indoor wet and dry spaces.

	ПКП
Technical documentation	TU VC-013-2016
Degree of protection*	IP66, IP65, IP67
Flammability category	UL94 V0
Auto-ignition temperature	960°C
Enclosure material	thermoplastic
Cable gland material	brass
Number of cable glands	1-4
Cable diameter, mm	8-16
Voltage, V:	
- alternating current	400
- direct current	220
Mass, kg	0,25

The list of installed devices is on page 4/7.

Supply with acceptance:

- RMRS
- RRR

