


Control and indication station, 3ПКП series.

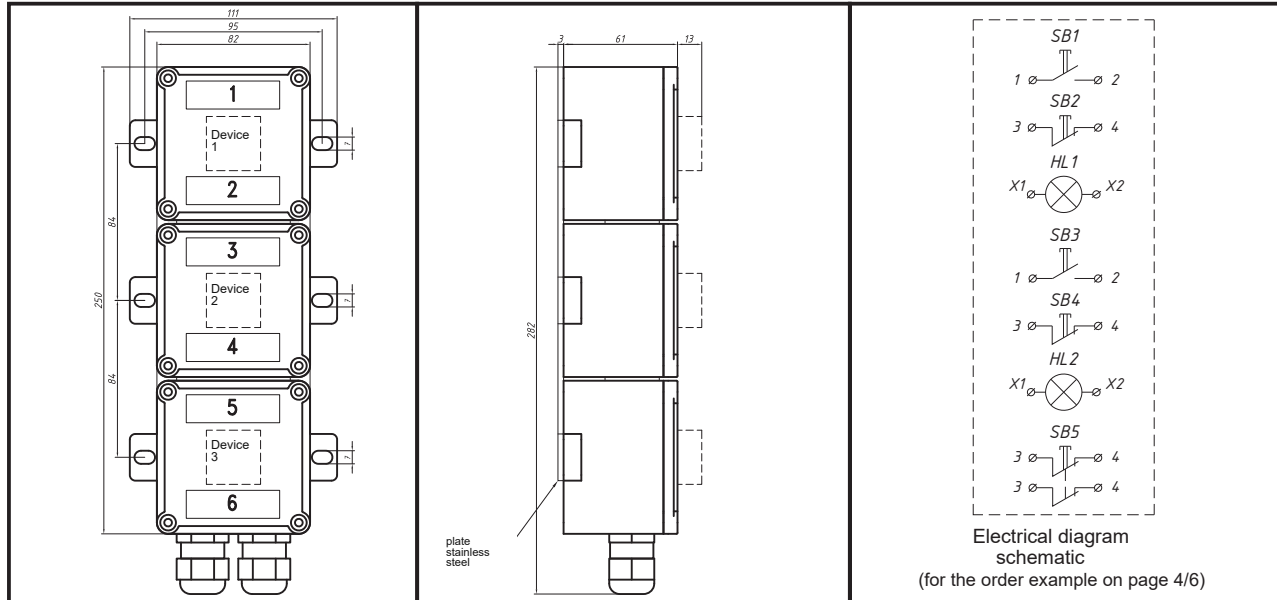

Description: Triple push-button station made of impact-resistant, fiberglass-reinforced thermoplastic, resistant to solar radiation and flame-retardant.

Designed for switching AC control circuits up to 400 V at 50 Hz and DC circuits up to 220 V and/or providing local or remote indication signals.

*OM climatic version, installation category 1 per GOST 15150-69. Degree of protection: IP66; IP65 when fitted with a buzzer; IP67 when fitted with a cam switch or selector, per GOST 14254-96. Suitable for open decks and indoor wet and dry spaces.

3ПКП	
Technical documentation	TU VC-013-2016
Degree of protection*	IP66, IP65, IP67
Flammability category	UL94 V0
Auto-ignition temperature	960°C
Enclosure material	thermoplastic
Cable gland material	brass
Number of cable glands	1-4
Cable diameter, mm	8-16
Voltage, V:	
- alternating current	400
- direct current	220
Mass, kg	1,20

The list of installed devices is on page 4/7.

Supply with acceptance:

- RMRS
- RRR



Junction boxes

Metal junction boxes

Plug transformers

Push-button stations

Cam switches

Cam selector switches

Cabin switches and sockets

Junction boxes with protection unit

Power boxes with protection unit

Interference suppression filters

Electromagnetic starters

AC UPS

DC UPS

Media server