


Cam switch СПБ2-16-3-67-OM1

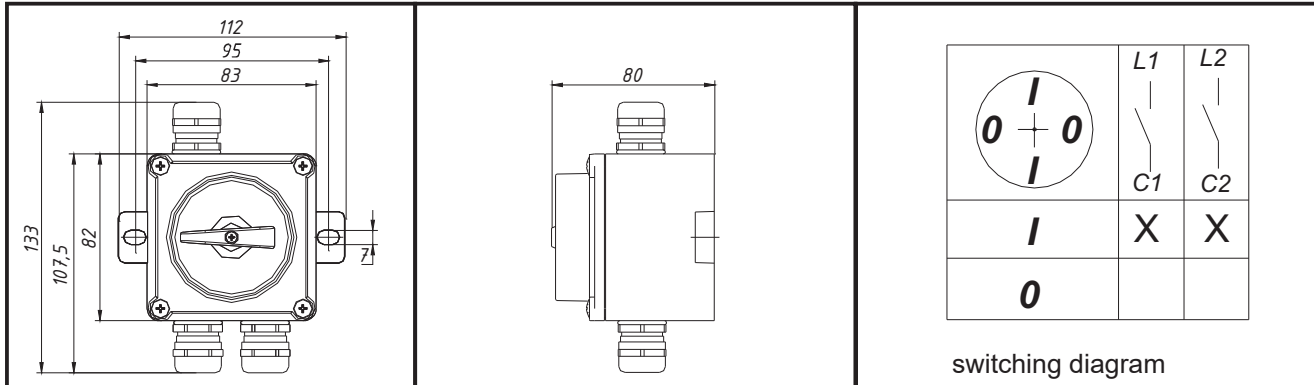

Description: СПБ-type cam switch made of impact-resistant, glass-fibre-reinforced, flame-retardant thermoplastic. Intended for use in electrical networks with DC voltage up to 220 V and AC voltage up to 400 V at a frequency of 50 Hz. OM climatic version, installation category 1, IP67 degree of protection, for installation on open decks (including vessels with unrestricted service area), as well as in indoor damp and dry spaces.

СПБ2-16-3-67-OM1	
Technical documentation (RMRS, RRR acceptance)	TU VC-012-2015
Technical documentation (VP acceptance)	TU VC-012-2015B
Degree of protection	IP67
Flammability category	UL94 V0
Auto-ignition temperature	960°C
Enclosure material	thermoplastic
Cable gland material	brass
Number of cable glands	3
Cable diameter, mm	8-16
Terminal block	2 poles, 1 terminal, 2.5 mm ² .
Connect no more than two conductors with a cross-section of 2.5 mm ² to the terminal.	
Terminal lug type	Ring
Voltage, V:	
- alternating current	400
- direct current	220
Rated current, A	10 at 400V
	16 at a voltage not exceeding 220V
Mass, kg	0,306

Manufacture with an external M4 grounding screw is possible.

Manufacture with a cable entry of a different diameter is possible (6-12, 10-14, 8-16, 13-18 mm).

To be specified when ordering: СПБ2-16-3-67-OM1 with external grounding screw, diameter cable entry 6-12 mm.

Supply with acceptance:

- RMRS
- RRR
- VP



Junction boxes

Metal junction boxes

Plug transformers

Push-button stations

Cam switches

Cam selector switches

Cabin switches and sockets

Junction boxes with protection unit

Power boxes with protection unit

Interference suppression filters

Electromagnetic starters

AC UPS

DC UPS

Media server